


# Rams & Extensions

## Model RLR - Rug Lifting Rams

**QUICKSHIP PROGRAM**

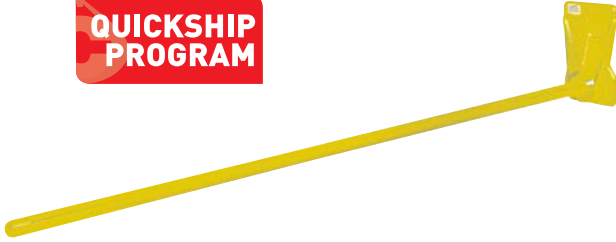

### PRODUCT FEATURES:

- Available for both Class II and Class III lift trucks.
- Carriage locking pin standard.
- Minimum lost load center.
- Pole made of alloy steel.
- Class II carriage, hanger and baseplate are 1 piece.
- Class III carriage, hanger and baseplate are welded.
- Standard and heavy duty designs available.
- Fork-mounted base unit available.

### SPECIFICATIONS - Standard Duty

Model Number	Rated Capacity (lbs.) @72" Load Center	Carriage Class	Pole Length (ft.)	Pole Diameter (in.)	Weight (lbs.)
8B-90	1000	II	9	2-3/4	259
8B-100	1000	II	10	2-3/4	275
8B-110	1000	II	11	2-3/4	292
8B-120	1000	II	12	2-3/4	309
8G-90	1400	II	9	3	291
8G-100	1400	II	10	3	311
8G-110	1400	II	11	3	331
8G-120	1400	II	12	3	351
9B-90	1000	III	9	2-3/4	256
9B-100	1000	III	10	2-3/4	272
9B-110	1000	III	11	2-3/4	289
9B-120	1000	III	12	2-3/4	306

### SPECIFICATIONS - Heavy Duty

Model Number	Rated Capacity (lbs.) @72" Load Center	Carriage Class	Pole Length (ft.)	Pole Diameter (in.)	Weight (lbs.)
8D-90	1800	II	9	3-1/4	329
8D-100	1800	II	10	3-1/4	353
8D-110	1800	II	11	3-1/4	377
8D-120	1800	II	12	3-1/4	401
8E-90	2900	II	9	3-3/4	410
8E-100	2900	II	10	3-3/4	443
8E-110	2900	II	11	3-3/4	476
8E-120	2900	II	12	3-3/4	509
8H-90	4300	II	9	4-1/4	505
8H-100	4300	II	10	4-1/4	547
8H-110	4300	II	11	4-1/4	590
8H-120	4300	II	12	4-1/4	633

### SPECIFICATIONS - Fork Mounted

Model Number	Rated Capacity (lbs.) @72" Load Center	Overall Length (ft.)	Pole Length (ft.)	Pole Dia. (in.)	Fork Pocket Size (in.)	Fork Pocket Spacing (in.)	Weight (lbs.)
8F-90	1000	11	9	2-3/4	2-1/2 X 7-1/2	31	298
8F-100	1000	12	10	2-3/4	2-1/2 X 7-1/2	31	313
8F-110	1000	13	11	2-3/4	2-1/2 X 7-1/2	31	330
8F-120	1000	14	12	2-3/4	2-1/2 X 7-1/2	31	347

### WARNING

Carrying capacity is only for the rug ram. Maximum roll length is 12'

### WARNING

Capacity of lift truck and attachment combination may be less than capacity shown on attachment. Consult lift truck manufacturer.