

Application Evaluation: Vacuum Lifters

MATERIAL TO BE HANDLED:

- ☐ Steel ☐ Aluminum ☐ Glass ☐ Stone Slabs ☐ Plastic/Fiberglass
☐ Other _____ (Provide detailed sketch)

MATERIAL TEMPERATURE IS:

- ☐ Under 200° F
☐ 200° to 600° F
☐ Over 600° F (Specify temperature)

MATERIAL DIMENSIONS:

Minimum: Length: _____ Width: _____ Thickness: _____ (required)
Maximum: Length: _____ Width: _____ Thickness: _____
Maximum Capacity Required: _____

MATERIAL ORIENTATION DURING LIFT:


- ☐ Horizontal Only ☐ Vertical Only
☐ Horizontal to Vertical

POWER AVAILABLE:

- ☐ Electric Specify: ☐ 115v/1ph/60hz
 ☐ 230-460v/3ph/60hz
 ☐ 230v dc
☐ Compressed Air (60-90 PSIG required; 4000 lbs. max. cap.)
☐ No External Power (Battery-operated required)

HOOK SIZE OR HOOK OPENING:

Required for crane hook
(O) Opening (including safety latch): _____
(H) Height: _____
(W) Width: _____

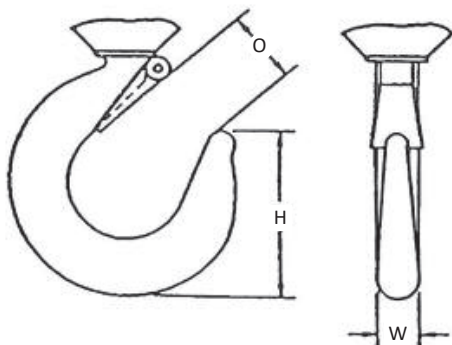

OPTIONS REQUIRED:

- ☐ Side Handle
If yes, specify length: _____
☐ Parking Stand
☐ Audible Low Vacuum Warning
☐ Custom Pendant Control (Standard is 2-button)
☐ Wireless Pendant Control

HEADROOM AVAILABLE: _____

Contact: _____
Company: _____
Address: _____
City, State, Zip: _____
Phone: _____
Fax: _____
Email: _____

For a price quote on your specific application,
please complete the above form and fax to
The Caldwell Group at **815-229-5686**
or you can complete this form online at
www.caldwellinc.com/applications.