

# Model 23QS

## Roll Lifting Beams

Sometimes the simple designs are the best. This product has been part of the Caldwell assortment for a long time ... and for good reason. It works. You tell us how to cut the J-hooks and choose fixed or pivot. They're fast to set, easy to train, and help material handlers on the shop floor get the job done.

### Product Features:

- Standard beam sizes
- J-Hooks are custom cut per order to fit your specific application
- Hooks can be fixed or pivot style
- J-Hooks are quickly and infinitely adjustable between minimum and maximum spread
- Complies with ASME standards




### PRODUCT OPERATION



Photo courtesy of J.B Kenehan Printing Services, Waukesha, WI

### MODEL 23QS

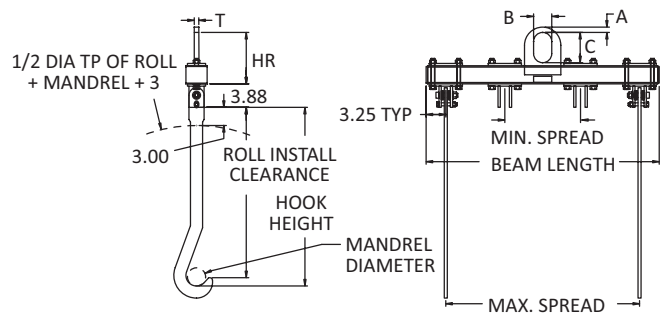

NOTE: All dimensions shown in inches.

Capacity (tons)	Model Number HR Headroom (in.) Min. Spread (in.)	Max. Spread (ft.)						Hook Thickness (in.)	Bail (in.)			
		3	4	6	8	10	12		A	B	C	T
1/2	<b>Model Number</b>	<b>23QS-1/2-3</b>	<b>23QS-1/2-4</b>	<b>23QS-1/2-6</b>	<b>23QS-1/2-8</b>	<b>23QS-1/2-10</b>	<b>23QS-1/2-12</b>	1/2	7/8	3	5	3/4
	HR Headroom Min. Spread	8 1/2 12	8 1/2 12	8 1/2 12	8 1/2 24	9 1/2 24	9 1/2 24					
1	<b>Model Number</b>	<b>23QS-1-3</b>	<b>23QS-1-4</b>	<b>23QS-1-6</b>	<b>23QS-1-8</b>	<b>23QS-1-10</b>	<b>23QS-1-12</b>	1/2	7/8	3	5	3/4
	HR Headroom Min. Spread	8 1/2 12	8 1/2 12	9 1/2 12	9 1/2 24	10 1/2 24	10 1/2 24					
2	<b>Model Number</b>	<b>23QS-2-3</b>	<b>23QS-2-4</b>	<b>23QS-2-6</b>	<b>23QS-2-8</b>	<b>23QS-2-10</b>	<b>23QS-2-12</b>	1/2	7/8	3	5	3/4
	HR Headroom Min. Spread	9 1/2 12	9 1/2 12	10 1/2 12	11 1/2 24	12 1/2 24	12 1/2 24					
3	<b>Model Number</b>	<b>23QS-3-3</b>	<b>23QS-3-4</b>	<b>23QS-3-6</b>	<b>23QS-3-8</b>	<b>23QS-3-10</b>	<b>23QS-3-12</b>	3/4	1 1/2	3	5	1
	HR Headroom Min. Spread	10 1/2 12	10 1/2 12	11 1/2 24	12 1/2 24	13 1/2 24	13 1/2 24					
5	<b>Model Number</b>	<b>23QS-5-3</b>	<b>23QS-5-4</b>	<b>23QS-5-6</b>	<b>23QS-5-8</b>	<b>23QS-5-10</b>	<b>23QS-5-12</b>	1	2	4	7	1
	HR Headroom Min. Spread	13 1/2 24	14 1/2 24	15 1/2 24	17 1/2 24	17 1/2 24	19 1/2 24					