


Model F

Heavy-Duty Quad Crossarms with 8 Pads

For lifting longer, wider, and heavier weight material or to provide increased support of thin material.

Sponge vacuum pads used to handle rough material such as tread plate.

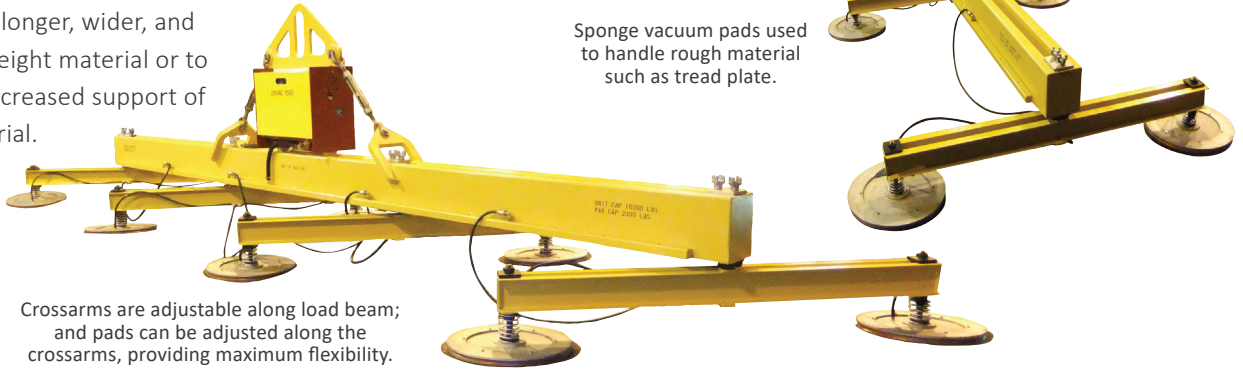

Crossarms are adjustable along load beam; and pads can be adjusted along the crossarms, providing maximum flexibility.

Electric

Rated Capacity (lbs.)	Base Wt. @ 5' (lbs.)	Power-Pac	Flared Diameter (in.)	Model Number for Load Beam (choose beam length)					
				6 ft.	8 ft.	10 ft.	12 ft.	15 ft.	20 ft.
With 3' Crossarm Beams									
3200	670	UNIVAC-330	10-5/8	FE32V8-6-Q3	FE32V8-8-Q3	FE32V8-10-Q3	FE32V8-12-Q3	FE32V8-15-Q3	FE32V8-20-Q3
4800	700	UNIVAC-330	12-1/4	FE48V10-6-Q3	FE48V10-8-Q3	FE48V10-10-Q3	FE48V10-12-Q3	FE48V10-15-Q3	FE48V10-20-Q3
6400	735	UNIVAC-330	14-1/4	FE64V12-6-Q3	FE64V12-8-Q3	FE64V12-10-Q3	FE64V12-12-Q3	FE64V12-15-Q3	FE64V12-20-Q3
8000	795	UNIVAC-330	16	FE80V14-6-Q3	FE80V14-8-Q3	FE80V14-10-Q3	FE80V14-12-Q3	FE80V14-15-Q3	FE80V14-20-Q3
12000	1260	*UNIVAC-1500	19	FE120V16-6-Q3	FE120V16-8-Q3	FE120V16-10-Q3	FE120V16-12-Q3	FE120V16-15-Q3	FE120V16-20-Q3
15200	1490	*UNIVAC-1500	23	FE152V20-6-Q3	FE152V20-8-Q3	FE152V20-10-Q3	FE152V20-12-Q3	FE152V20-15-Q3	FE152V20-20-Q3
With 4' Crossarm Beams									
3200	680	UNIVAC-330	10-5/8	FE32V8-6-Q4	FE32V8-8-Q4	FE32V8-10-Q4	FE32V8-12-Q4	FE32V8-15-Q4	FE32V8-20-Q4
4800	710	UNIVAC-330	12-1/4	FE48V10-6-Q4	FE48V10-8-Q4	FE48V10-10-Q4	FE48V10-12-Q4	FE48V10-15-Q4	FE48V10-20-Q4
6400	745	UNIVAC-330	14-1/4	FE64V12-6-Q4	FE64V12-8-Q4	FE64V12-10-Q4	FE64V12-12-Q4	FE64V12-15-Q4	FE64V12-20-Q4
8000	810	UNIVAC-330	16	FE80V14-6-Q4	FE80V14-8-Q4	FE80V14-10-Q4	FE80V14-12-Q4	FE80V14-15-Q4	FE80V14-20-Q4
12000	1270	*UNIVAC-1500	19	FE120V16-6-Q4	FE120V16-8-Q4	FE120V16-10-Q4	FE120V16-12-Q4	FE120V16-15-Q4	FE120V16-20-Q4
15200	1500	*UNIVAC-1500	23	FE152V20-6-Q4	FE152V20-8-Q4	FE152V20-10-Q4	FE152V20-12-Q4	FE152V20-15-Q4	FE152V20-20-Q4
With 5' Crossarm Beams									
3200	690	UNIVAC-330	10-5/8	FE32V8-6-Q5	FE32V8-8-Q5	FE32V8-10-Q5	FE32V8-12-Q5	FE32V8-15-Q5	FE32V8-20-Q5
4800	720	UNIVAC-330	12-1/4	FE48V10-6-Q5	FE48V10-8-Q5	FE48V10-10-Q5	FE48V10-12-Q5	FE48V10-15-Q5	FE48V10-20-Q5
6400	755	UNIVAC-330	14-1/4	FE64V12-6-Q5	FE64V12-8-Q5	FE64V12-10-Q5	FE64V12-12-Q5	FE64V12-15-Q5	FE64V12-20-Q5
8000	820	UNIVAC-330	16	FE80V14-6-Q5	FE80V14-8-Q5	FE80V14-10-Q5	FE80V14-12-Q5	FE80V14-15-Q5	FE80V14-20-Q5
12000	1280	*UNIVAC-1500	19	FE120V16-6-Q5	FE120V16-8-Q5	FE120V16-10-Q5	FE120V16-12-Q5	FE120V16-15-Q5	FE120V16-20-Q5
15200	1510	*UNIVAC-1500	23	FE152V20-6-Q5	FE152V20-8-Q5	FE152V20-10-Q5	FE152V20-12-Q5	FE152V20-15-Q5	FE152V20-20-Q5

Other sizes available, consult factory.

*NOTE: 230/460V Power-Pac.

Shop Air - Venturi

Rated Capacity (lbs.)	Base Wt. @ 5' (lbs.)	Power-Pac	Flared Diameter (in.)	Model Number for Load Beam (choose beam length)					
				6 ft.	8 ft.	10 ft.	12 ft.	15 ft.	20 ft.
With 3' Crossarm Beams									
3200	540	V-40	10-5/8	FA32V8-6-Q3	FA32V8-8-Q3	FA32V8-10-Q3	FA32V8-12-Q3	FA32V8-15-Q3	FA32V8-20-Q3
With 4' Crossarm Beams									
3200	540	V-40	10-5/8	FA32V8-6-Q4	FA32V8-8-Q4	FA32V8-10-Q4	FA32V8-12-Q4	FA32V8-15-Q4	FA32V8-20-Q4
With 5' Crossarm Beams									
3200	540	V-40	10-5/8	FA32V8-6-Q5	FA32V8-8-Q5	FA32V8-10-Q5	FA32V8-12-Q5	FA32V8-15-Q5	FA32V8-20-Q5

Other sizes available, consult factory.