




Model FL

Flange Lifter

Choose from 10 styles, five English and five Metric configurations. Don't see what you need? No worries! We can custom design a unit that's right for you.

Product Features:

- Five models available to upend and lift any flange per ASME B16.5
- Each model can handle a wide range of flanges
- Can be used to handle blind flanges and flanges being welded to pipe
- Robust design allows the user to upend the flange when necessary
- The lifting eye is easily adjustable which allows the user to "plumb" the flange
- Custom designs are available

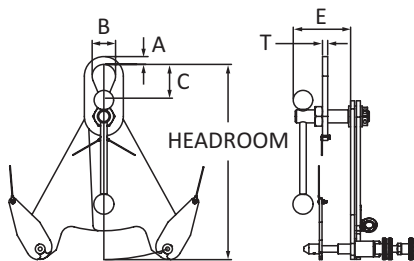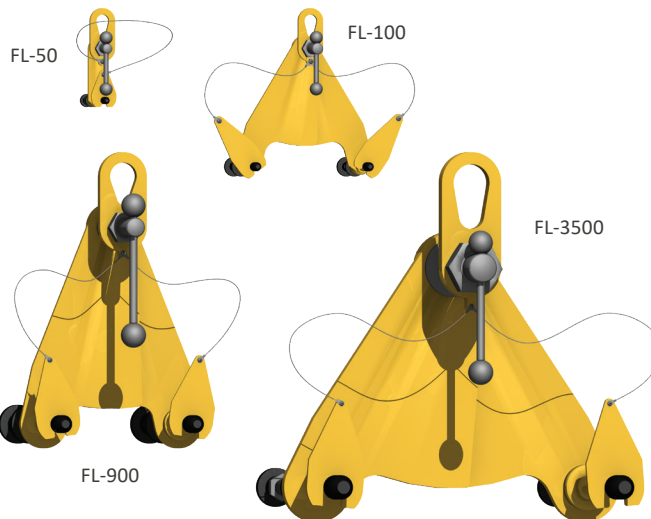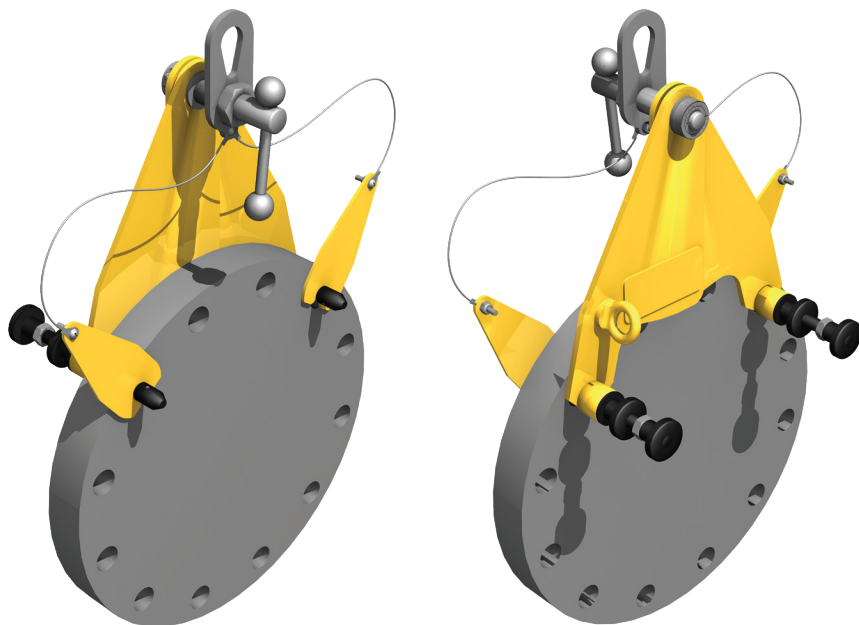

English

No. of Lift Holes	Model	Hole Size		Flange Diameter		Flange Thickness		CG Adjust Max.	A	B	C	T	E	Headroom	Capacity (lbs.)	Unit Weight (lbs.)
		Min.	Max.	Min.	Max.	Min.	Max.									
1	FL-50	5/8	1-1/4	3-1/2	8	7/16	1-3/4	1-3/8	1/2	1	1-3/4	1/4	3	6-5/8	50	3
2	FL-100	3/4	1	6-1/2	16	7/8	1-5/8	1-3/8	1/2	1	1-3/4	1/4	3-5/8	12-7/8	100	11
2	FL-800	1	1-5/8	8-1/2	36	1-1/4	2-3/4	2-7/16	3/4	2-1/4	3-1/4	1/2	5-5/8	21-1/4	800	28
2	FL-900	1-1/2	2	14	32	2-7/8	4-1/4	3	13/16	2	3-1/4	5/8	7-1/4	21-1/8	900	51
2	FL-3500	2	3-5/8	19	46	4-7/8	8	5	15/16	3	5	1	9-1/4	28	3500	153

Metric

No. of Lift Holes	Model	Hole Size		Flange Diameter		Flange Thickness		CG Adjust Max.	A	B	C	T	E	Headroom	Capacity (lbs.)	Unit Weight (lbs.)
		Min.	Max.	Min.	Max.	Min.	Max.									
1	FL-50	15.9	31.8	88.9	203.2	11.1	44.5	34.9	12.7	25.4	44.5	6.4	76.2	168.3	23	1.4
2	FL-100	19.1	25.4	165.1	406.4	22.2	41.3	34.9	12.7	25.4	44.5	6.4	92.1	327.0	45	5.0
2	FL-800	25.4	41.3	215.9	914.4	31.8	69.9	61.9	19.1	57.2	32.6	12.7	142.9	539.8	362	12.7
2	FL-900	38.1	50.8	355.6	812.8	73.0	108.0	76.2	20.6	50.8	32.6	15.9	184.2	536.6	408	23.1
2	FL-3500	50.8	92.1	482.6	1168.4	123.8	203.2	127.0	23.8	76.2	127.0	25.4	235.0	711.2	1586	69.3