

VLBS/VLBS-U

CUSTOMER FAVORITE

VIP-Weldable Load Ring/ VIP-Load Ring Weldable-Captive

Product Features:

- Large WLL range 1.5 t – 16 t
- Functionally optimized shape of the suspension ring for better support at side loading and protection of the clamping spring
- Suspension ring can be pivoted through 180°
- WLL possible up to 90° in load ring plane
- The clamping spring achieves noise reduction and keeps the suspension ring in the desired position
- Distance knobs on the weld-on block for the necessary distance for root welding
- Choose standard VLBS with detachable bracket and weld-on block for the right application
- Choose the VLBS-U with captive or undetachable bracket and weld-on block, due to the retaining spring, making it easier to handle



PRODUCT DETAILS

Function-optimized shape of the suspension ring



Clamping spring




Distance knobs on weld-on block





Clear marking of the minimum WLL



180° WLL in the folding direction

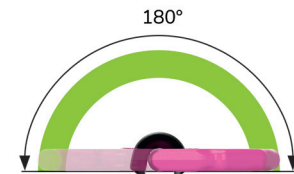

180° WLL in the load ring plane

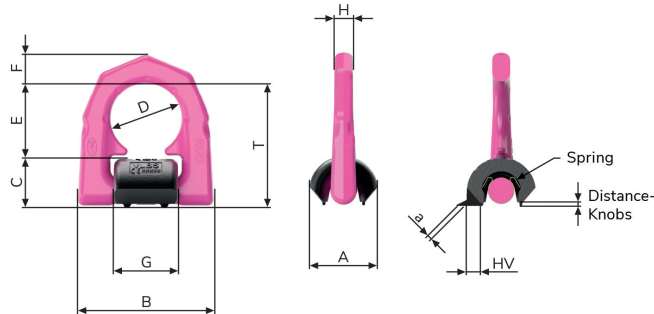

VLBS/VLBS-U

Type	WLL (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Welding Seam	Model Number
VLBS – VIP-Load Ring For Welding (Without Clamping Spring)													
VLBS 1.5t	1.5	0.35	65	33	66	25	38	40	14	33	14	HV5 + a3	7993115
VLBS 2.5t	2.5	0.53	75	36	77	27	45	47	16	40	14	HV7 + a3	7995346
VLBS 4t	4	0.76	83	42	87	31	51	52	18	46	16	HV8 + a3	7993116
VLBS 6.7t	6.7	1.9	117	61	115	44	67	73	24	60	22	HV12 + a4	7993117
VLBS 10t	10	2.76	126	75	129	55	67	71	26.5	60	26	HV16 + a4	7993118
VLBS 16t	16	7.1	176	96	192	70	100	106	40	90	26.5	HV25 + a6	7993041
VLBS-U – VIP-Captive Weld-On Load Ring (With Clamping Spring)													
VLBS-U 1.5t	1.5	0.35	65	33	66	25	38	40	14	33	14	HV5 + a3	7993035
VLBS-U 2.5t	2.5	0.53	75	36	77	27	45	47	16	40	14	HV7 + a3	7994830
VLBS-U 4t	4	0.76	83	42	87	31	51	52	18	46	16	HV8 + a3	7993036
VLBS-U 6.7t	6.7	1.9	117	61	115	44	67	73	24	60	22	HV12 + a4	7993037
VLBS-U 10t	10	2.76	126	75	129	55	67	71	26.5	60	26	HV16 + a4	7993040
VLBS-U 16t	16	7.1	176	96	192	70	100	106	40	90	26.5	HV25 + a6	7906640

IN STOCK

IN STOCK

IN STOCK

IN STOCK

IN STOCK

Subject to technical changes!