

VRBS

VIP-Load Ring For Welding

Product Features:

- Large WLL range 4 t – 31.5 t
- Clear indication of the minimum WLL for all loading directions
- Patented wear markings for easy determination of wear
- Distance knobs on the weld-on block for the necessary distance for root welding
- The weld-on block is forged from a material that is easy to weld
- Split force introduction thanks to multiple point fixing
- Suspension ring pivots 180°
- WLL possible up to 90° in load ring plane



PRODUCT DETAILS

Split force introduction




WLL possible up to 90° in load ring plane




180° pivoting





Patented wear marker



WLL angle in load ring plane



WLL angle for side loading

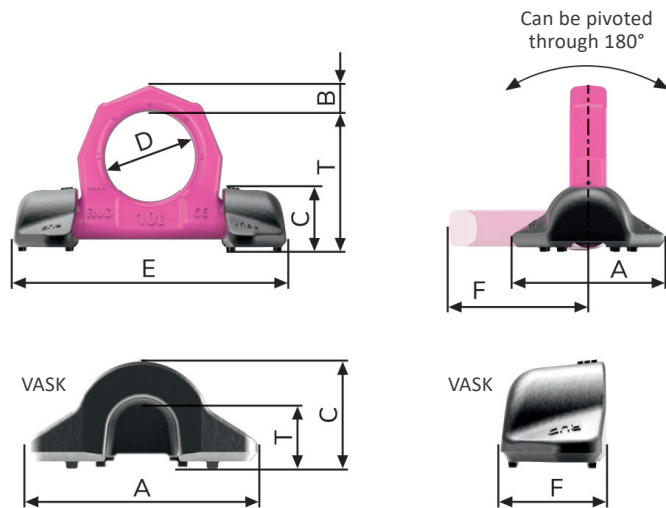

VRBS

Type	WLL (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Welding Seam	Model Number
VRBS – VIP-Load Ring For Welding											
VRBS 4t	4	0.8	65	62	14	28	48	135	71	HY 4 + a3	7992488
VRBS 6.7t	6.7	1.6	84	88	20	39	60	170	92	HY 5.5 + a3	7992489
VRBS 10t	10	2.6	95	100	22	46	65	195	100	HY 6 + a4	7992490
VRBS 16t	16	5.53	127	130	30	57	90	263	134	HY 8.5 + a4	7992491
VRBS 31.5t	31.5	15.6	178	160	42	79	130	375	195	HY 18 + a4	60267
VASK – VRBS-Weld-On Block											
VRBS 4t	4	0.13	19	62	-	28	-	-	30	HY 4 + a3	7992004
VRBS 6.7t	6.7	0.34	24	88	-	39	-	-	36	HY 5.5 + a3	7992005
VRBS 10t	10	0.63	31	100	-	46	-	-	46	HY 6 + a4	7992007
VRBS 16t	16	1.3	39	130	-	57	-	-	57	HY 8.5 + a4	7992008
VRBS 31.5t	31.5	3.24	49	160	-	78	-	-	82	HY 18 + a4	7987160

Subject to technical changes!