

VRBS-FIX



VIP-Load Ring Weldable FIX

Product Features:

- Large WLL range 4 t – 100 t
- Split force introduction thanks to multiple point fixing
- Suspension ring can be pivoted through 180°
- WLL possible up to 90° in load ring plane
- The weld arrangement (circular fillet weld), eliminates the occurrence of contact/crevice corrosion
- Forged markings for easy determination of the load angle
- Patented wear markings for easy determination of wear
- The clamping spring achieves noise reduction and keeps the suspension ring in the desired direction
- No time-consuming alignment of the weld-on blocks to the ring link
- Parts firmly connected through radial clamping springs
- No rusting: all-round HY weld



PRODUCT DETAILS

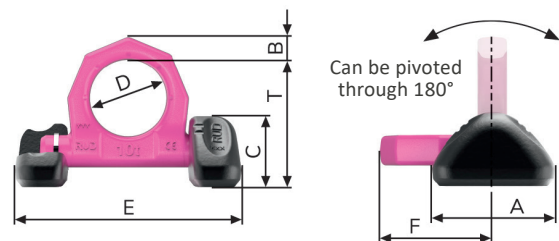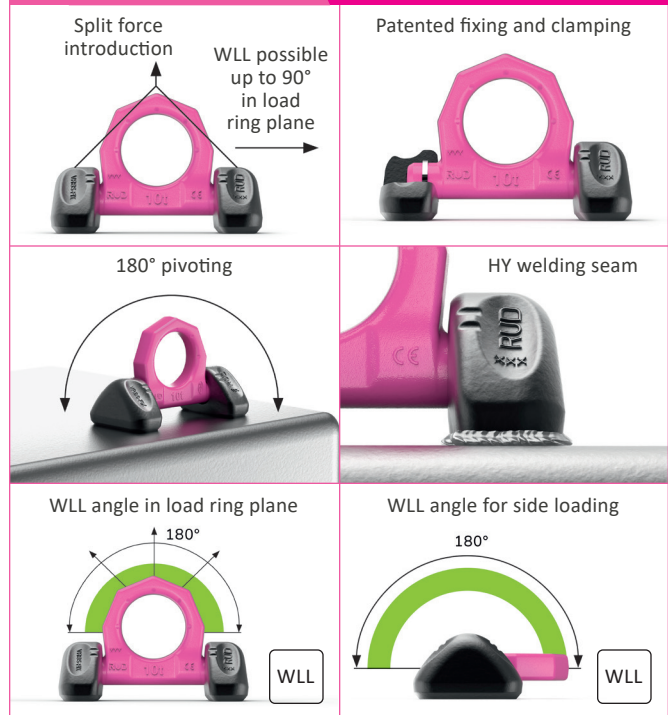

VRBS-Fix

Type	WLL (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Welding Seam	Model Number
VRBS-Fix 4t	4	0.94	74	60	14	39	48	132	69	HY 3	7999019
VRBS-Fix 6.7t	6.7	2.24	97	88	20	50	60	167	91	HY 5	7999020
VRBS-Fix 10t	10	3.72	108	100	22	60	65	191	100	HY 6	7999021
VRBS-Fix 16t	16	8.23	140	130	30	72	90	267	134	HY 9	7999301
VRBS-Fix 31.5t	31.5	18.36	202	160	42	99	130	366	195	HY 12	7999302
VRBS-Fix 50t	50	64.86	330	246	70	148	230	596	335	HY 19	7906272
VRBS-Fix 100t	100	148.2	390	320	97	195	250	763	392	HY 28	7906273

Subject to technical changes!