


VRBK-FIX

VIP-Load Ring Edge FIX

Product Features:

- Large WLL range 4 t – 50 t
- Split force introduction thanks to multiple point fixing
- Suspension ring pivots 270°
- WLL possible up to 90° in load ring plane
- The weld arrangement (circular fillet weld), eliminates the occurrence of contact/crevice corrosion
- Patented wear markings for easy determination of wear
- The clamping spring achieves noise reduction and keeps the suspension ring in the desired direction
- Can be pivoted through 270°
- Pre-assembled unit of suspension ring and weld-on blocks
- No rusting: all-round HY weld

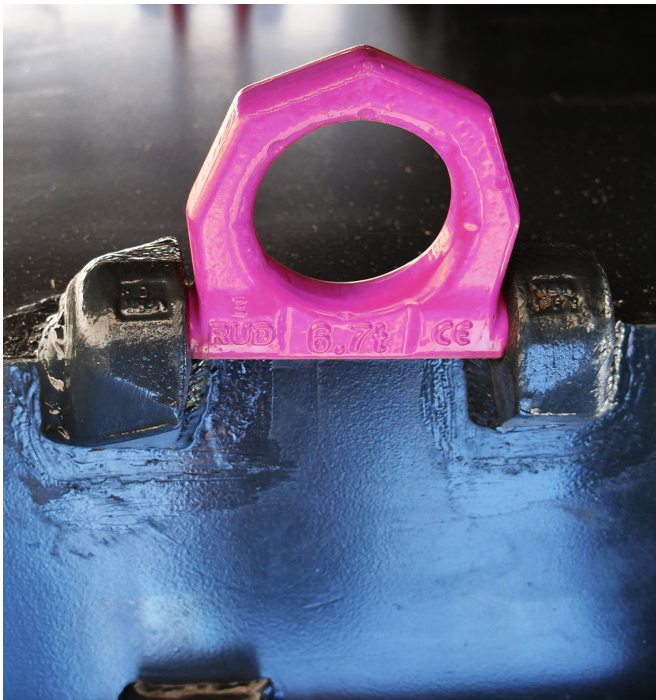

Split force introduction




Patented fixing and clamping



270° pivoting





HY welding seam

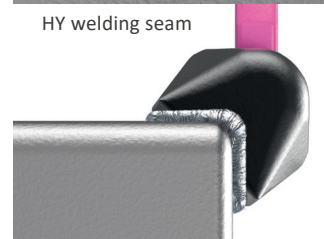


WLL angle in load ring plane



WLL angle for side loading

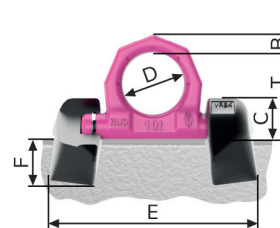

Can be pivoted through 270°



VRBK-Fix

Type	WLL (t)	Weight (kg/unit)	T (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Welding Seam	Model Number
VRBK-Fix 4t	4	1.05	65	32	14	28	48	141	30	HY 4 + a3	7902149
VRBK-Fix 6.7t	6.7	2.16	84	40	20	35	60	181	34	HY 5 + a3	7902150
VRBK-Fix 10t	10	4.4	94	52	22	46	65	212	46	HY 8 + a3	7902256
VRBK-Fix 16t	16	9.73	126	66	27	57	90	284	64	HY 10	7909845
VRBK-Fix 31.5t	31.5	24.84	177	89	42	78	130	394	70	HY 17	7906225
VRBK-Fix 50t	50	76.35	303	134	70	118	230	626	96	HY 25	7904653

Subject to technical changes!