

Hoists



Model MM, ME, and EE - Standard Hoist Packages

- **Capacity Range:** 1/8 to 8 ton.
- **Power Supply:** 208-230/460V-3-60 (others are available).
- **Control Voltage:** 110V.
- **Classifications:** ASME H4, ISO-M5 or M4, FEM-2m or 1Am.

PRODUCT FEATURES:

- Heavy duty design.
- Upper and lower limit switch.
- Thermal protected fan cooled motor.
- Bottom swivel hook with safety latch.
- Chain container.
- Ergonomically designed push button station.

SPECIFICATIONS - When ordering please specify flange range A or B - for example: ME-3-10-A.

	Manual Trolley / Manual Hoist			Dimensions (in.)	Manual Trolley / Electric Hoist			Dimensions (in.)	Flange Range (in.)*	
									A	B
Capacity (tons)	1/4			D - 7.2 C - 0.7 G - 1.1	1/4			D - 7.2 C - 0.9 G - 1.1	Models MM and ME	
Lift (ft.)	10	15	20		10	15	20			
Model Number	MM-1/4-10	MM-1/4-15	MM-1/4-20		ME-1/4-10	ME-1/4-15	ME-1/4-20		hoist 36 fpm	
Weight (lbs.)	35	40	45		71	73	74			
Speeds	N/A		N/A		N/A					
Headroom (in.)	16.1			15.6						
Capacity (tons)	1/2			D - 7.2 C - 0.7 G - 1.1	1/2			D - 7.2 C - 0.9 G - 1.1	Models MM and ME	
Lift (ft.)	10	15	20		10	15	20			
Model Number	MM-1/2-10	MM-1/2-15	MM-1/2-20		ME-1/2-10	ME-1/2-15	ME-1/2-20		hoist 15 fpm	
Weight (lbs.)	35	40	45		82	85	88			
Speeds	N/A		N/A		N/A					
Headroom (in.)	16.1			16.3						
Capacity (tons)	1			D - 9.3 C - 0.9 G - 1.1	1			D - 9.3 C - 1.2 G - 1.2	Models MM and ME	
Lift (ft.)	10	15	20		10	15	20			
Model Number	MM-1-10	MM-1-15	MM-1-20		ME-1-10	ME-1-15	ME-1-20		hoist 14 fpm	
Weight (lbs.)	47	53	59		121	126	130			
Speeds	N/A		N/A		N/A					
Headroom (in.)	18.3			18.5						
Capacity (tons)	2			D - 11.0 C - 1.2 G - 1.4	2			D - 11.0 C - 1.7 G - 1.5	Models MM and ME	
Lift (ft.)	10	15	20		10	15	20			
Model Number	MM-2-10	MM-2-15	MM-2-20		ME-2-10	ME-2-15	ME-2-20		hoist 14 fpm	
Weight (lbs.)	78	87	96		190	198	206			
Speeds	N/A		N/A		N/A					
Headroom (in.)	24.8			20.5						
Capacity (tons)	3			D - 12.8 C - 1.5 G - 1.7	3			D - 12.8 C - 1.9 G - 1.7	Models MM and ME	
Lift (ft.)	10	15	20		10	15	20			
Model Number	MM-3-10	MM-3-15	MM-3-20		ME-3-10	ME-3-15	ME-3-20		hoist 16 fpm	
Weight (lbs.)	114	125	135		311	323	334			
Speeds	N/A		N/A		N/A					
Headroom (in.)	29.5			27.8						
Capacity (tons)	5			D - 13.7 C - 1.9 G - 1.8	5			D - 15.7 C - 2.2 G - 1.9	Model MM	
Lift (ft.)	10	15	20		10	15	20		4.92-7.02	7.03-12.00
Model Number	MM-5-10	MM-5-15	MM-5-20		ME-5-10	ME-5-15	ME-5-20		Model ME	
Weight (lbs.)	184	199	213		399	418	437			
Speeds	N/A		N/A		N/A				3.94-7.02	7.03-12.00
trolley 40 fpm	hoist 11 fpm		G - 1.9							
Capacity (tons)	8			D - 19.4	8			D - 18.9	Models MM and ME	
Lift (ft.)	10	15	20		10	15	20			
Model Number	MM-8-10	MM-8-15	MM-8-20		ME-8-10	ME-8-15	ME-8-20			
Weight (lbs.)	311	323	334		311	323	334			
Speeds	N/A		N/A		N/A					
Headroom (in.)	27.7			35.4						
Headroom (in.)	33.1									
Capacity (tons)	8									
Lift (ft.)	10	15	20	10	15	20				
10 15	20	D - 19.7								

Top Hook Hoist for easy trolley mounting.
Hand chain with drop is 18" less than lift.



Top Hook Hoist for easy trolley mounting, includes push button pendant control (2 buttons) with 15ft. power cord standard on 1/4 to 5 ton models. 30 ft. power cord standard on 8 ton models with cable hangers every 5 ft.

Hoists

PRODUCT OPTIONS:

- **Additional Power Cord Length** - specify total length required.
- **Tag Line Kit** - for up to 30' beam length.
- **Tag Line Brackets**

QUICKSHIP PROGRAM

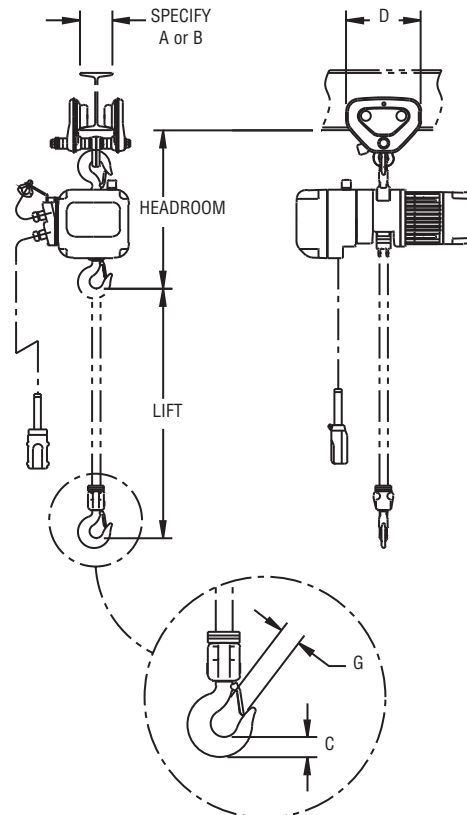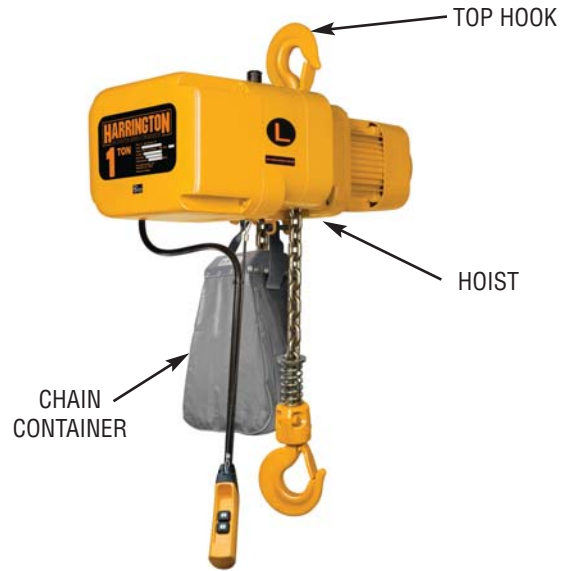

Electric Trolley / Electric Hoist			Dimensions (in.)	Flange Range (in.)*	
				A	B
1/4			D - 12.4 C - 0.9 G - 1.1	Model EE only	
10	15	20		2.28-5.00	5.01-6.02
EE-1/4-10	EE-1/4-15	EE-1/4-20			
128	130	131			
trolley 40 fpm	hoist 36 fpm				
14.8					
1/2			D - 12.4 C - 0.9 G - 1.1	Model EE only	
10	15	20		2.28-5.00	5.01-6.02
EE-1/2-10	EE-1/2-15	EE-1/2-20			
139	142	145			
trolley 40 fpm	hoist 15 fpm				
15.6					
1			D - 15.6 C - 1.2 G - 1.2	Model EE only	
10	15	20		2.28-5.00	5.01-6.02
EE-1-10	EE-1-15	EE-1-20			
170	175	179			
trolley 40 fpm	hoist 14 fpm				
17.1					
2			D - 12.8 C - 1.7 G - 1.5	Model EE only	
10	15	20		3.23-6.02	6.03-7.02
EE-2-10	EE-2-15	EE-2-20			
245	253	261			
trolley 40 fpm	hoist 14 fpm				
22.4					
3			D - 17.4 C - 1.9 G - 1.7	Model EE only	
10	15	20		3.23-6.02	6.03-7.02
EE-3-10	EE-3-15	EE-3-20			
362	374	385			
trolley 40 fpm	hoist 16 fpm				
25.4					
5			D - 15.8 C - 2.2	Model EE only	
10	15	20		3.94-7.01	7.02-7.60
EE-5-10	EE-5-15	EE-5-20			
443	462	481			
25.4					
5			D - 15.8 C - 2.2	Model EE only	
10	15	20		3.94-7.01	7.02-7.60
EE-5-10	EE-5-15	EE-5-20			
443	462	481			
25.4					
5			D - 15.8 C - 2.2	Model EE only	
10	15	20		3.94-7.01	7.02-7.60
EE-5-10	EE-5-15	EE-5-20			
443	462	481			
25.4					

Includes push button pendant control (5 buttons) with 30 ft. power cord standard and cable hangers every 5 feet.

* When ordering please specify flange range A or B.