


Wide Applications

Model D - Twin Crossarms with 4 Pads - Heavy Duty

For lifting wide or thin material. Crossarms allow for extra stability for wider material and reduce amount of deflection for thinner material.

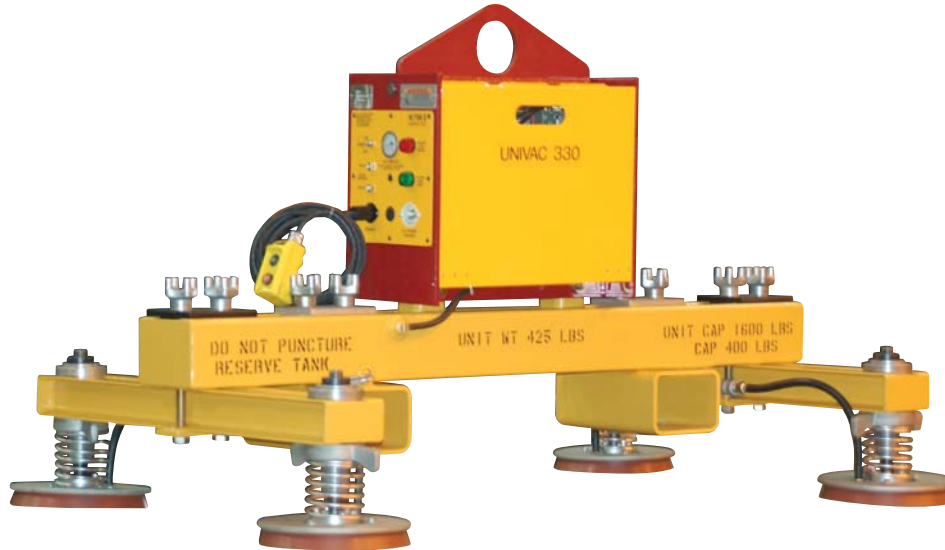

Unit shown with optional fork pockets.

SPECIFICATIONS

Add FEET to blank Model Number box to complete code.
Example: 5' load beam - DE32V12 LENGTH | D3

Rated Capacity (lbs.)	Base Wt. @ 5' (lbs.)	Model Number	Power-Pac	Flared Diameter (in.)	Load Beam Length (ft.)		
					5	6	8
Electric							
With 3' Crossarm Beams							
3200	485	DE32V12 <input type="text"/> D3	UNIVAC-330	14-1/4	5	6	8
4000	520	DE40V14 <input type="text"/> D3	UNIVAC-330	16	5	6	8
6000	535	DE60V16 <input type="text"/> D3	UNIVAC-330	19	—	6	8
8000	970	DE80V20 <input type="text"/> D3	*UNIVAC-1500	23	—	—	8
With 4' Crossarm Beams							
3200	495	DE32V12 <input type="text"/> D4	UNIVAC-330	14-1/4	5	6	8
4000	520	DE40V14 <input type="text"/> D4	UNIVAC-330	16	5	6	8
6000	545	DE60V16 <input type="text"/> D4	UNIVAC-330	19	—	6	8
8000	980	DE80V20 <input type="text"/> D4	*UNIVAC-1500	23	—	—	8
Shop Air - Venturi							
With 3' Crossarm Beams							
3200	355	DA32V12 <input type="text"/> D3	V-40	14-1/4	5	6	8
4000	380	DA40V14 <input type="text"/> D3	V-40	16	5	6	8
With 4' Crossarm Beams							
3200	365	DA32V12 <input type="text"/> D4	V-40	14-1/4	5	6	8
4000	390	DA40V14 <input type="text"/> D4	V-40	16	5	6	8

Other sizes available, consult factory.

* NOTE: 230/460V Power Pac.