


Alloy Chain Slings - Grade 100

Single Chain Slings

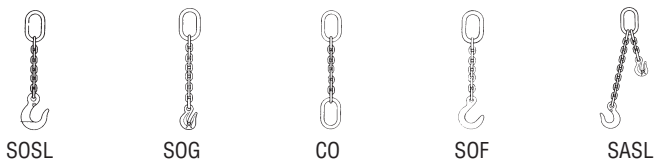


QUICKSHIP PROGRAM

SPECIFICATIONS

Chain Size (in.)	Rated Cap. Vertical (lbs.)	Approx. Wt. 5 Foot Reach Type SOS (lbs.)	Oblong Link (in.)			Foundry Hook (in.)			Sling Hook With Latch (in.)		
						Throat	Width	Depth	Throat	Width	Depth
			A	B	C	T	L	K	T	L	K
9/32	4300	5	1/2	2-1/2	5	2.50	1.00	1.23	1.06	.73	1.05
3/8	8800	10	3/4	3	6	3.00	1.27	1.50	1.31	.95	1.28
1/2	15000	18	1	4	8	3.50	1.50	1.75	1.56	1.17	1.66
5/8	22600	27	1	4	8	4.00	1.81	2.03	1.75	1.44	2.19
3/4	35300	44	1-1/4	4-3/8	8-3/4	4.50	2.20	2.56	2.19	1.69	2.51


Double Chain Slings

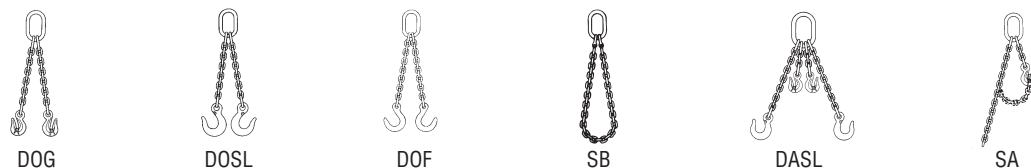

SPECIFICATIONS

Chain Size (in.)	Rated Cap. @ 60° (lbs.)	Approx. Wt. 5 Foot Reach Type DOS (lbs.)	Oblong Link At Top (in.)			Foundry Hook (in.)			Sling Hook With Latch (in.)		
						Throat	Width	Depth	Throat	Width	Depth
			A	B	C	T	L	K	T	L	K
9/32	7400	10	1/2	2-1/2	5	2.50	1.00	1.23	1.06	.73	1.05
3/8	15200	17	3/4	3	6	3.00	1.27	1.50	1.31	.95	1.28
1/2	26000	32	1	4	8	3.50	1.50	1.75	1.56	1.17	1.66
5/8	39100	51	1-1/4	4-3/8	8-3/4	4.00	1.81	2.03	1.75	1.44	2.19
3/4	61000	74	1-1/2	5-1/4	10-1/2	4.50	2.20	2.56	2.19	1.69	2.51

Triple and Quadruple Chain Slings

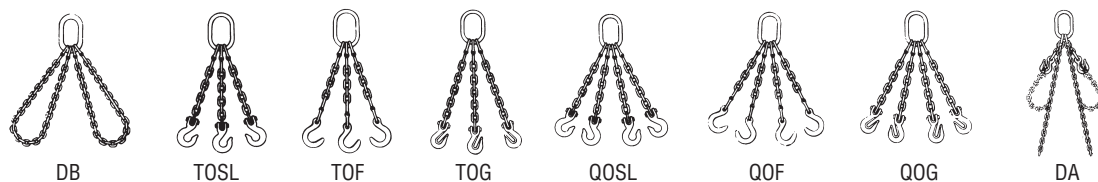

SPECIFICATIONS

Chain Size (in.)	Rated Cap. @ 60° (lbs.)	Approx. Wt. 5 Foot Reach Type TOS (lbs.)	Approx. Wt. 5 Foot Reach QSOS (lbs.)	Oblong Link (in.)			Foundry Hook (in.)			Sling Hook With Latch (in.)		
							Throat	Width	Depth	Throat	Width	Depth
				A	B	C	T	L	K	T	L	K
9/32	11200	16	19	3/4	2-3/4	5-1/2	2.50	1.00	1.23	1.06	.73	1.05
3/8	22900	28	36	1	4	8	3.00	1.27	1.50	1.31	.95	1.28
1/2	39000	53	63	1-1/4	4-3/8	8-3/4	3.50	1.50	1.75	1.56	1.17	1.66
5/8	58700	81	100	1-1/2	5-1/4	10-1/2	4.00	1.81	2.03	1.75	1.44	2.19
3/4	91700	116	140	1-3/4	6	12	4.50	2.20	2.56	2.19	1.69	2.51

Other configurations available, consult factory.