


# Wire Mesh Slings

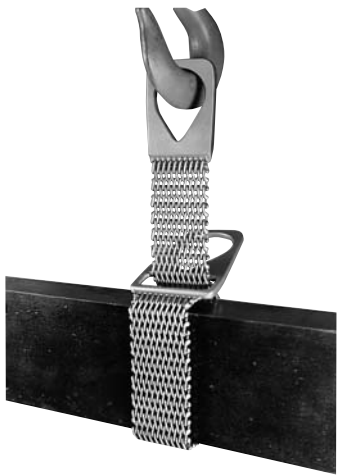


**QUICKSHIP PROGRAM**

## PRODUCT FEATURES:

- Resists abrasion and cutting for greater sling life.
- Low stretch and good flexibility reduce load damage.
- Wide bearing area distributes load to help avoid load damage.
- Alloy steel end fittings - plated for long life.
- Wire mesh is zinc plated - resists corrosion.
- Each sling permanently stamped with capacity and serial number.
- Each sling proof tested and certified.
- Width of mesh helps control and balance load.
- Repairable - thus very cost effective.

## Specifications

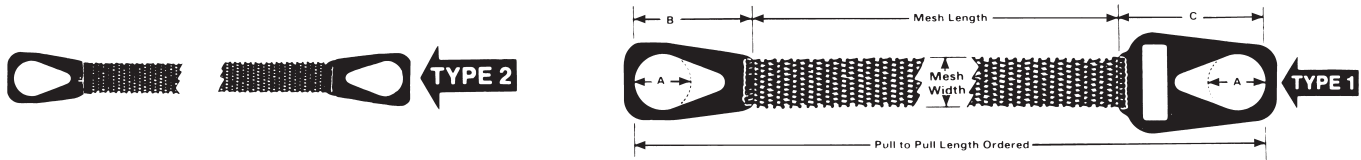

## SPECIFICATIONS

Mesh Width (in.)	Rated Capacities (lbs.)		End Fitting Dimensions (in.)			Model Number			Weight Per (lbs.)	
	Choker	Basket	A	B	C	Gage-Width	Length	Type	3 Ft.	Extra Ft.
2	2300	4600	2	3-7/8	5-5/8	10-2	Specify Pull to Pull Length	Specify Type 1 or 2	6	1.3
3	3500	7000	2-1/4	4-3/8	6-1/4	10-3			8	1.9
4	4800	9600	3	5	6-3/4	10-4			10	2.5
6	7200	14400	3-1/2	5-5/8	7-3/4	10-6			14	3.9
8	9600	19200	4-1/2	7-1/2	9	10-8			19	5.1
10	12000	24000	4-3/4	8	10-7/8	10-10			25	6.4
12	14400	28800	5	8-5/8	11-3/8	10-12			29	7.6
14	16800	33600	5	8-3/4	12-3/4	10-14			38	8.9
16	19200	38400	5-1/4	9-1/8	14-1/4	10-16			50	10
18	21600	43200	5-1/2	9-3/4	15-3/4	10-18			70	11
20	24000	48000	5-3/4	10-1/8	17	10-20	77	13		

## Applications

