

Model 23QS

Roll Lifting Beams

Sometimes the simple designs are the best. This product has been part of the Caldwell assortment for a long time ... and for good reason. It works. You tell us how to cut the J-hooks and choose fixed or pivot. They're fast to set, easy to train, and help material handlers on the shop floor get the job done.

Product Features:

- Standard beam sizes
- J-Hooks are custom cut per order to fit your specific application
- Hooks can be fixed or pivot style
- J-Hooks are quickly and infinitely adjustable between minimum and maximum spread
- Complies with ASME standards


PRODUCT OPERATION



Photo courtesy of J.B Kenehan Printing Services, Waukesha, WI



MODEL 23QS

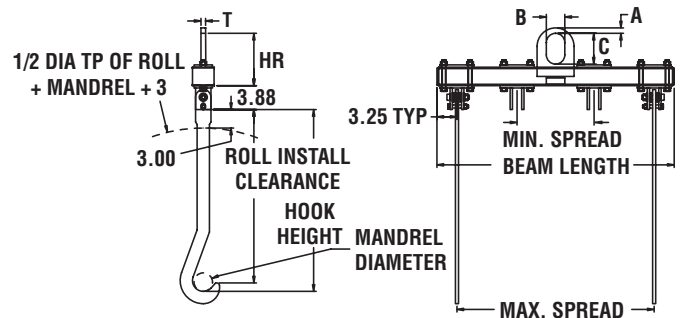

Note: All dimensions shown in inches.

Capacity (tons)	Model Number HR Headroom (in.) Min. Spread (in.)	Max. Spread (ft.)						Hook Thickness (in.)	Bail (in.)			
		3	4	6	8	10	12		A	B	C	T
1/2	Model Number HR Headroom Min. Spread	23QS-1/2-3 8 1/2 12	23QS-1/2-4 8 1/2 12	23QS-1/2-6 8 1/2 12	23QS-1/2-8 8 1/2 24	23QS-1/2-10 9 1/2 24	23QS-1/2-12 9 1/2 24	1/2	7/8	3	5	3/4
1	Model Number HR Headroom Min. Spread	23QS-1-3 8 1/2 12	23QS-1-4 8 1/2 12	23QS-1-6 9 1/2 12	23QS-1-8 9 1/2 24	23QS-1-10 10 1/2 24	23QS-1-12 10 1/2 24	1/2	7/8	3	5	3/4
2	Model Number HR Headroom Min. Spread	23QS-2-3 9 1/2 12	23QS-2-4 9 1/2 12	23QS-2-6 10 1/2 12	23QS-2-8 11 1/2 24	23QS-2-10 12 1/2 24	23QS-2-12 12 1/2 24	1/2	7/8	3	5	3/4
3	Model Number HR Headroom Min. Spread	23QS-3-3 10 1/2 12	23QS-3-4 10 1/2 12	23QS-3-6 11 1/2 24	23QS-3-8 12 1/2 24	23QS-3-10 13 1/2 24	23QS-3-12 13 1/2 24	3/4	1 1/2	3	5	1
5	Model Number HR Headroom Min. Spread	23QS-5-3 13 1/2 24	23QS-5-4 14 1/2 24	23QS-5-6 15 1/2 24	23QS-5-8 17 1/2 24	23QS-5-10 17 1/2 24	23QS-5-12 19 1/2 24	1	2	4	7	1