

Model JPA

Locking Type

The **Model JPA** is a vertical lifting clamp capable of turning a single plate or member from horizontal to vertical to horizontal through a 180° arc. Incorporates a push button auxiliary lock. Permits side loading of lifting shackle to 90° by de-rating of clamp's rated capacity. Refer to Figure 1 for de-rated capacities.

Model JPA incorporates a pivoting shackle that permits side loading of the lifting shackle at 100% of rated capacity from vertical to 30° , 75% of rated capacity between 30° and 45° and 50% of rated capacity between 45° and 90°. See Figure 1.



Versatile and heavier duty with capacities up to 50 tons.

MODEL JPA EXPLODED VIEW


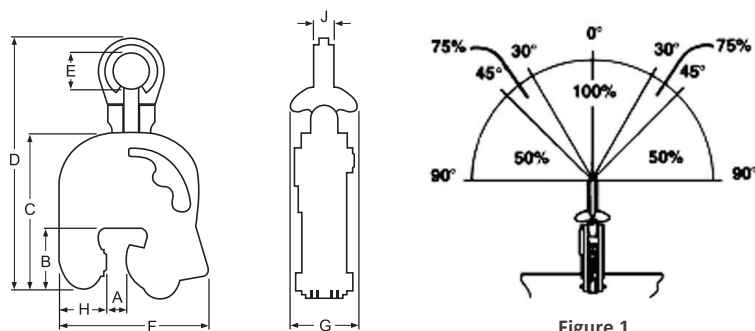


Figure 1

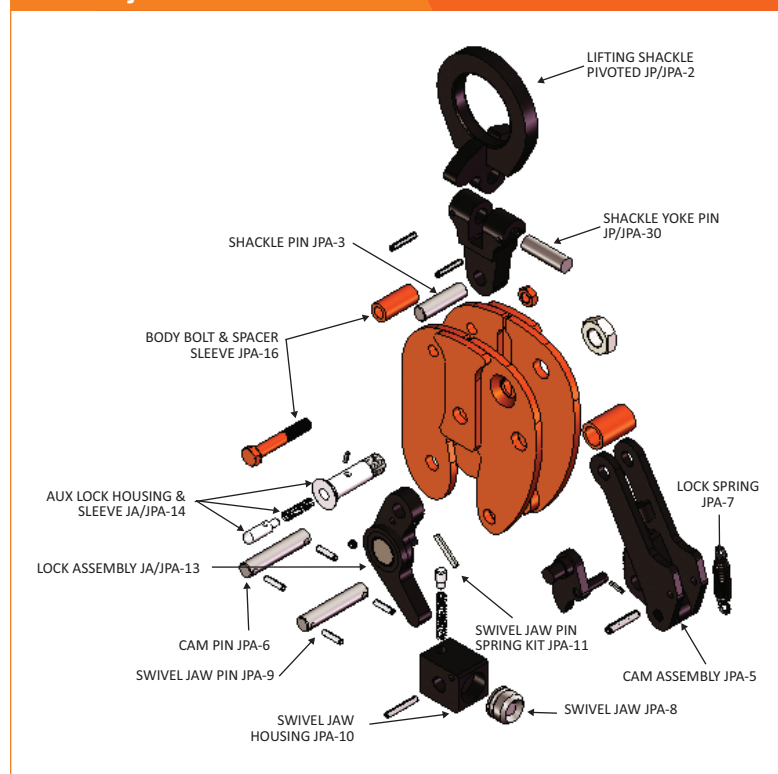

Is Your Team Ready?

Safe lifts don't happen on accident. You know that safe lifts happen because everyone on your team follows stringent inspection and maintenance protocols. Not only do those things extend the life of your equipment, they more importantly protect the lives of your team.

Get your team ready to protect lives and equipment with RENFROE's two-day training courses. We educate operators on the safe use of our clamps and help prepare them to instruct others. Classes can be held at your facility or at our Beloit, WI headquarters and are led by our in-house experts.

To learn more, Call 815.229.5667 today.

MODEL JPA SPECIFICATIONS (in inches)

	Part Number	Plate Thickness A	B	C	Max. D	E	Max. F	G	H	J	Weight (lbs.)
	1/2 Tons Capacity										
IN STOCK	JPA-00.50-A	0 – 5/8	2-3/4	6-1/2	12	2-3/8	5-5/8	3-1/4	2-1/4	1/2	12
	JPA-00.50-B	1/2 – 1	2-3/4	6-1/2	12	2-3/8	6	3-1/4	2-1/4	1/2	
	JPA-00.50-C	3/4 – 1-1/4	2-3/4	6-1/2	12	2-3/8	6-1/4	3-1/4	2-1/4	1/2	
	JPA-00.50-D	1-1/4 – 1-3/4	2-3/4	6-1/2	12	2-3/8	6-3/4	3-1/4	2-1/4	1/2	
	1 Tons Capacity										
IN STOCK	JPA-01.00-A	0 – 3/4	3-3/8	7-3/4	13-3/4	2-5/8	7	3-1/2	2-5/8	5/8	20
	JPA-01.00-B	1/2 – 1	3-3/8	7-3/4	13-3/4	2-5/8	7-1/4	3-1/2	2-5/8	5/8	
	JPA-01.00-C	3/4 – 1-1/4	3-3/8	7-3/4	13-3/4	2-5/8	8	3-1/2	2-5/8	5/8	
	JPA-01.00-D	1 – 1-1/2	3-3/8	7-3/4	13-3/4	2-5/8	8-1/4	3-1/2	2-5/8	5/8	
	JPA-01.00-E	1-1/2 – 2	3-3/8	7-3/4	13-3/4	2-5/8	8-3/4	3-1/2	2-5/8	5/8	
	2 Tons Capacity										
IN STOCK	JPA-02.00-A	0 – 1	3-5/8	9-1/2	17-3/8	3-1/2	8-3/4	4-1/2	3	3/4	40
	JPA-02.00-B	3/4 – 1-1/2	3-5/8	9-1/2	17-3/8	3-1/2	9-1/4	4-1/2	3	3/4	
	JPA-02.00-C	1-1/4 – 2	3-5/8	9-1/2	17-3/8	3-1/2	9-3/4	4-1/2	3	3/4	
	JPA-02.00-D	2 – 2-3/4	3-5/8	9-1/2	17-3/8	3-1/2	10-1/2	4-1/2	3	3/4	
	4 Tons Capacity										
IN STOCK	JPA-04.00-A	3/16 – 1-1/4	4-3/8	11-1/2	20-1/8	3-1/2	9-1/4	4-1/2	3-1/4	1-1/2	50
	JPA-04.00-B	1 – 2	4-3/8	11-1/2	20-1/8	3-1/2	10	4-1/2	3-1/4	1-1/2	
	JPA-04.00-C	2 – 3	4-3/8	11-1/2	20-1/8	3-1/2	11	4-1/2	3-1/4	1-1/2	
	JPA-04.00-D	3 – 4	4-3/8	11-1/2	20-1/8	3-1/2	12	4-1/2	3-1/4	1-1/2	
	6 Tons Capacity										
	JPA-06.00-A	1/4 – 1-3/8	4-7/8	12-3/8	20-7/8	3-5/8	10-3/4	4-3/4	3-3/4	1-3/4	72
	JPA-06.00-B	1 – 2-1/8	4-7/8	12-3/8	20-7/8	3-5/8	11-1/2	4-3/4	3-3/4	1-3/4	
	JPA-06.00-C	2 – 3-1/8	4-7/8	12-3/8	20-7/8	3-5/8	12-1/2	4-3/4	3-3/4	1-3/4	
	JPA-06.00-D	3 – 4-1/8	4-7/8	12-3/8	20-7/8	3-5/8	13-1/2	4-3/4	3-3/4	1-3/4	
	8 Tons Capacity										
	JPA-08.00-A	3/8 – 1-1/2	5-3/8	12-3/4	22-5/8	3-3/4	12-3/8	5-1/4	4-1/4	2	93
	JPA-08.00-B	1 – 2-1/8	5-3/8	12-3/4	22-5/8	3-3/4	13	5-1/4	4-1/4	2	
	JPA-08.00-C	2 – 3-1/8	5-3/8	12-3/4	22-5/8	3-3/4	14-5/8	5-1/4	4-1/4	2	
	JPA-08.00-D	3 – 4-1/8	5-3/8	12-3/4	22-5/8	3-3/4	15-5/8	5-1/4	4-1/4	2	
	12 Tons Capacity										
	JPA-12.00-A	1/2 – 2-1/2	7-1/4	17-3/8	28-1/8	3-7/8	15-15/16	7-1/16	5-3/8	2	203
	JPA-12.00-B	2 – 4	7-1/4	17-3/8	28-1/8	3-7/8	17-7/16	7-1/16	5-3/8	2	212
	JPA-12.00-C	4 – 6	7-1/4	17-3/8	28-1/8	3-7/8	19-7/16	7-1/16	5-3/8	2	222
	16 Tons Capacity										
	JPA-16.00-A	1/2 – 2-1/2	8	19-13/16	32-5/16	4-1/2	19-13/16	8-11/16	6-1/4	2-1/4	350
	20 Tons Capacity										
	JPA-20.00-A	1/2 – 3	8-5/8	21-13/16	35-7/8	5	21	11-1/2	6-7/8	2-3/4	456
	25 Tons Capacity										
	JPA-25.00-A	1/2 – 2-1/2	8-5/8	23-5/8	35-7/8	5	19-1/16	9-5/8	6-3/4	3	483
	JPA-25.00-B	3 – 5	8-5/8	23-5/8	35-7/8	5	21-9/16	9-5/8	6-3/4	3	495
	JPA-25.00-C	4 – 6	8-5/8	23-5/8	35-7/8	5	22-9/16	9-5/8	6-3/4	3	502
	30 Tons Capacity										
	JPA-30.00-A	1/2 – 3	9-9/16	24-1/4	39-7/8	5	22-13/16	14-9/16	7-5/8	3	625
	50 Tons Capacity										
	JPA-50.00-A	3 – 5	10-7/8	30-7/8	46-7/16	5	29-3/16	11-1/8	9-1/4	3-1/2	1306

Consult factory for possible larger capacities. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.