
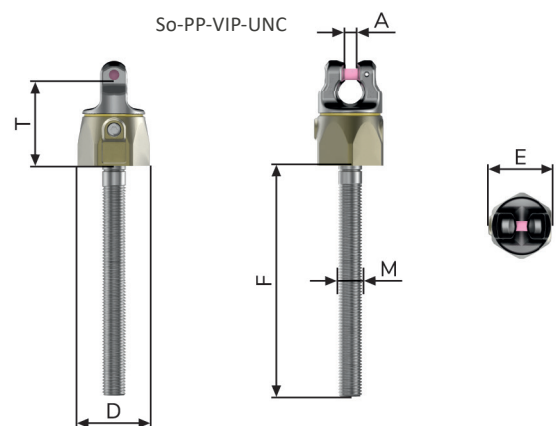
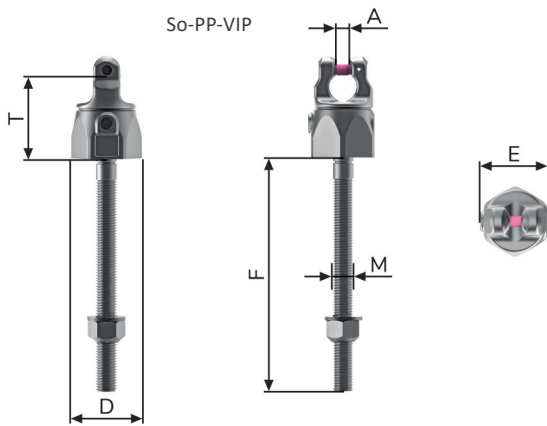


So-PP-VIP

Special PowerPoint

Product Features:

- Large WLL range 0.6 t – 8 t
- Can be combined with most commercial lifting means without additional connecting elements
- Lifting points pivots 360°
- Large distance between bolt-on surface and load to avoid damage
- Rotatable at nominal WLL, 90° to the bolt-on direction
- Lowest kinking possibility due to cardan joint

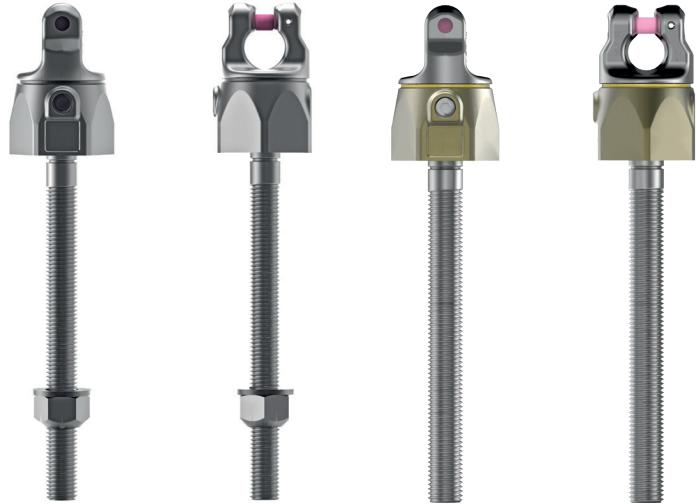

So-PP-VIP¹ - Special PowerPoint - VIP-Chain Connection

Type	WLL (t)	Weight (kg/unit)	T (mm)	A (mm)	D (mm)	E (mm)	F Vario (mm)	M	Tightening Torque (Nm)	Model Number
So-PP-VIP – Special PowerPoint – VIP-Chain Connection – Metric In Variable Length										
So-PP-VIP4-0.6t-M12	0.6 (0.63) ²	³	47	4	42	36	12-140	M12	10	8600320
So-PP-VIP6-1t-M14	1 (1.5) ²	³	58	6	48	41	14-160	M14	25	8600326
So-PP-VIP6-1.3t-M16	1.3 (1.5) ²	³	58	6	48	41	16-180	M16	30	8600321
So-PP-VIP8-2t-M20	2 (2.5) ²	³	73	8	61	55	20-224	M20	70	8600322
So-PP-VIP8-2t-M22	2 (2.5) ²	³	73	8	61	55	22-94	M22	70	8600322
So-PP-VIP10-3.5t-M24	3.5 (4) ²	³	94	10	81	70	24-255	M24	150	8600323
So-PP-VIP10-3.5t-M27	3.5 (4) ²	³	94	10	81	70	27-92	M27	200	8600323
So-PP-VIP13-5t-M30	5 (6.7) ²	³	108	13	99	85	30-330	M30	225	8600324
So-PP-VIP16-8t-M36	8 (10) ²	³	100	16	100	90	36-300	M36	410	8600305
So-PP-VIP16-8t-M39	8 (10) ²	³	100	16	100	90	39-300	M39	410	8600305
So-PP-VIP16-8t-M42	8 (10) ²	³	100	16	100	90	42-300	M42	410	8600305
So-PP-VIP – Special PowerPoint – VIP-Chain Connection – UNC Inch Thread In Variable Length										
So-PP-VIP4-0.6t-1/2"-13UNC	0.6 (0.63) ²	³	47	4	42	36	40-149	1/2"-13UNC	10	8600320
So-PP-VIP6-1t-5/8"-11UNC	1 (1.5) ²	³	58	6	48	41	50-180	5/8"-11UNC	25	8600321
So-PP-VIP8-2t-3/4"-10UNC	2 (2.5) ²	³	73	8	61	55	56-222	3/4"-10UNC	70	8600322
So-PP-VIP10-3.5t-1"-8UNC	3.5 (4) ²	³	94	10	81	70	25-74	1"-8UNC	150	8600323
So-PP-VIP13-5t-1-1/4"-7UNC	5 (6.7) ²	³	108	13	99	85	31-91	1-1/4"-7UNC	225	8600324

¹ So-PP can also be installed with eye hook as So-PP-S or with link as So-PP-B.

² () = Higher WLL with axial load.

³ Weight depends on the design.

Subject to technical changes!